


# T26 Crystal Tuning Fork




**FEATURES:**

**Tubular Package**  
**Pick and Place Compatible**

**Glass Sealed**  
**6.0 x 2.0 mm**

Parameter	Unit	Min.	Typ.	Max.
Frequency	kHz	32.768		
Operating Temperature Range	°C	-20 to +70 or -40 to +85		
Frequency Tolerance at 25°C	ppm	-	±20	-
Frequency Stability	ppm	±100, ±150		
Turnover Temperature	°C	25 ±5		
Load Capacitance (C <sub>L</sub> )	pF	6.0, 9.0 or 12.5		
Shunt Capacitance (C <sub>0</sub> )	pF	-	-	3
Temperature Coefficient	ppm/°C <sup>2</sup>	-	-	-0.04
Series Resistance (R)	kOhms	-	-	70
Drive Level	µW		0.1	0.5
Quality Factor (Q)		30000	-	-
Aging per year	ppm	-	-	±3
Storage Temperature	°C	-55	-	+125

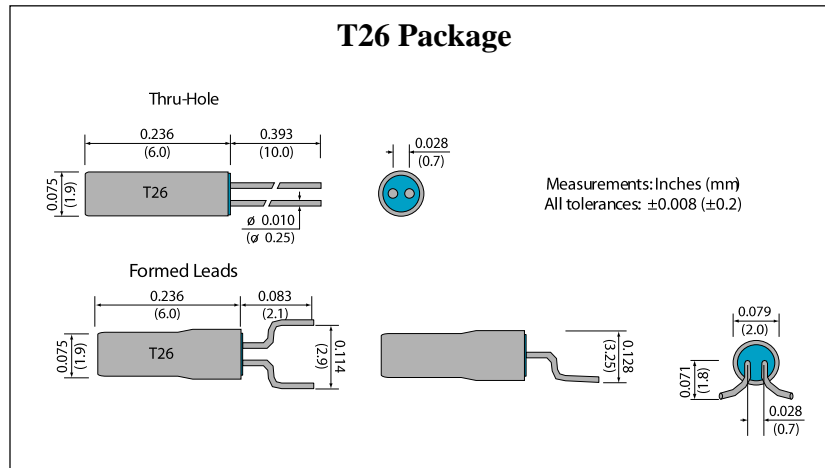

[Click To Quote](#)

Example Part Number: T26-A-A-48-A-32K768

