


TU1E Crystal Resonator



FEATURES:

2 Pad
High Reliability and Precision

Seam Sealed Lid
5.0 x 3.2 x 0.9 mm


Parameter	Unit	Min.	Typ.	Max.
Frequency Range (FR)	MHz	8.000	-	150.000
Operating Temperature Range	°C	See Table		
Frequency Tolerance at 25°C	ppm	±10	-	±50
Frequency Stability	ppm	See Table		
Load Capacitance (C _L)	pF	6	-	32
Shunt Capacitance (C ₀)	pF	-	-	7
Equivalent Series Resistance (R)	Ohms	See Table		
Drive Level	µW	10	-	100
Aging first year	ppm	-	-	±5.0
Insulation Resistance @ 100 V	M Ω	500	-	-
Storage Temperature Range	°C	-40	-	+85

Frequency (MHz)	ESR (Ohms) max.
Fundamental Mode	
8.000 to 10.000	100
>10.000 to 12.000	80
>12.000 to 20.000	60
>12.000 to 50.000	40
3 rd Overtone	
>40.000 to 150.000	80

Temperature	Stability (ppm)
-10 to +60°C	±10, ±15, ±20, ±25, ±30, ±50
-20 to +70°C	±10, ±15, ±20, ±25, ±30, ±50
-40 to +85°C	±15, ±20, ±25, ±30, ±50

Environmental

Terminal Material	W
Terminal Plating	Ni-Au
REACH Compliant	Yes
RoHS Compliant	Yes
RoHS Exemptions	No
Re-flow Temp. Max.	260°C
MSL	1

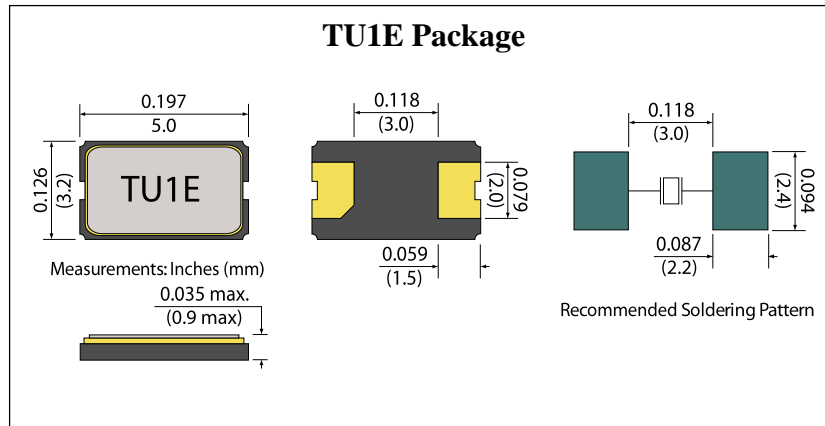

[Click To Quote](#)

Example Part Number: TU1E-D-E-16-18-25M576

TU1E	1	2	3	4	5	
Tolerance	A = ±50	B = ±30	C = ±25	D = ±20	E = ±15	F = ±10
Stability	A = ±50	B = ±30	C = ±25	D = ±20	E = ±15	F = ±10
Temp. Range	16 = -10 to +60°C	27 = -20 to +70°C	48 = -40 to +85°C			
Load Cap.	AA = Series	xx = Load	i.e. 16, 24, 32			
Frequency	Frequency in MHz i.e. 25M456 use M for decimal point					

Note: Consult factory for additional potential options not listed.