


TU2 Crystal Resonator



FEATURES:

**Tight Tolerance
4 pad**


**Seam Sealed Lid
7.0 x 5.0 x 1.3 mm**

Parameter	Unit	Min.	Typ.	Max.
Frequency Range (FR)	MHz	5.500	-	150.000
Operating Temperature Range	°C	See Table		
Frequency Tolerance at 25°C	ppm	±10	-	±50
Frequency Stability	ppm	See Table		
Load Capacitance (C _L)	pF	6	-	32
Shunt Capacitance (C ₀)	pF	-	-	7
Equivalent Series Resistance (R)	Ohms	See Table		
Drive Level	µW	10	-	100
Aging first year	ppm	-	-	±5.0
Insulation Resistance @ 100 V	M Ω	500	-	-
Storage Temperature Range	°C	-40	-	+85

Frequency (MHz)	ERS (Ohms) max.
Fundamental Mode	
5.500 to 8.000	100
>8.000 to 14.000	60
>14.000 to 40.000	40
3 rd Overtone	
>35.000 to 125.000	80

Temperature	Stability (ppm)
-10 to +60°C	±10, ±15, ±20, ±25, ±30, ±50
-20 to +70°C	±10, ±15, ±20, ±25, ±30, ±50
-40 to +85°C	±15, ±20, ±25, ±30, ±50

Environmental	
Terminal Material	W
Terminal Plating	Ni-Au
REACH Compliant	Yes
RoHS Compliant	Yes
RoHS Exemptions	No
Re-flow Temp. Max.	260°C
MSL	1

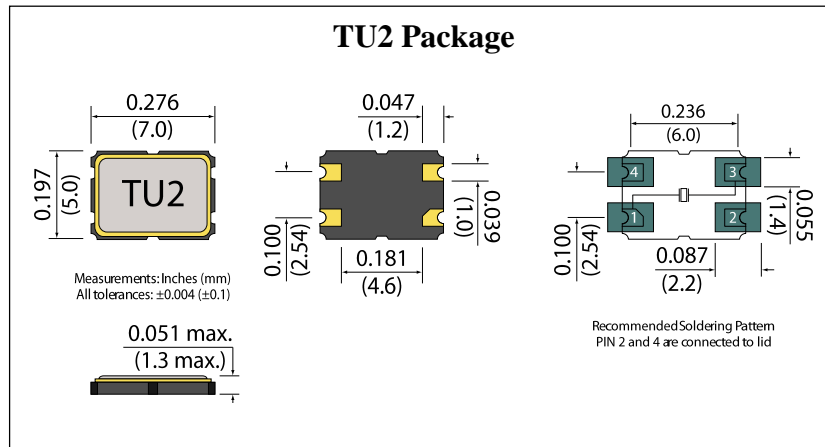

Click To Quote

Example Part Number: TU2-D-E-16-18-25M576

TU2	-	1	-	2	-	3	-	4	-	5
		Tolerance		Stability		Temp. Range		Load Cap.		Frequency
		A = ±50		A = ±50		16 = -10 to +60°C		AA = Series		Frequency in MHz
		B = ±30		B = ±30		27 = -20 to +70°C		xx = Load		i.e. 25M456
		C = ±25		C = ±25		48 = -40 to +85°C		i.e. 16, 24, 32		use M for decimal point
		D = ±20		D = ±20						
		E = ±15		E = ±15						
		F = ±10		F = ±10						

Note: Consult factory for additional potential options not listed.