


V3000TL

Voltage Controlled Crystal Oscillator



FEATURES:

LVDS

Multiplier


Ceramic Package

7.0 x 5.0 x 1.85 mm

Parameter	Unit	Min.	Max.
Frequency Range	MHz	9.5	622.08
Frequency Stability	ppm	See Table	
Storage Temperature Range	°C	-55	+125
Voltage	V	2.5, 3.3 ±5%	
Current Consumption	mA	-	80
Output Waveform		LVDS	
Output Load	Ohms	-	100
Output Voltage Logic High (VOH)	V	1.1	-
Output Voltage Logic Low (VOL)	V	-	1.4
Output Differential Voltage	mV	247	454
Offset Voltage	V	1.125	1.375
Transition Time (Rise and Fall)	nSec	0.7	1
Duty Cycle		45/55%	
Tri-state			
Enable	V	0.7	-
Disable	V	-	0.3
Frequency Deviation	ppm	±50	-
Start-up Time	mSec	-	3
Input Impedance	kHz	2000	-
RMS Jitter (Fundamental Mode)	pSec	-	1
RMS Jitter (Multiplier)	pSec	-	4

Frequency Stability is inclusive of Operating Temperature Range, Supply Voltage, Aging, Current and Load.

Control Voltage: 1.25 ±1.05V for 2.5V; 1.65±1.35V for 3.3V.

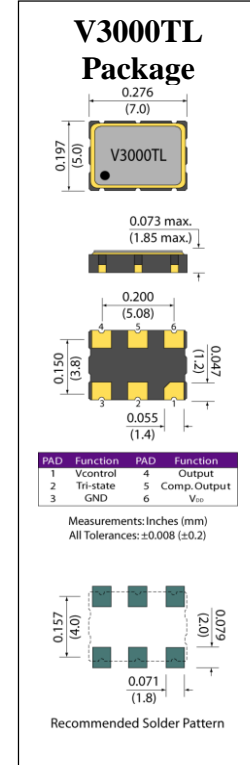

Frequency Stability

Temperature	Stability (ppm)
-10 to 60°C	±20, ±25, ±50
-20 to 70°C	±20, ±25, ±50
-40 to 85°C	±50

Environmental

Terminal Material	W
Terminal Plating	Ni-Au
REACH Compliant	Yes
RoHS Compliant	Yes
RoHS Exemptions	No
Re-flow Temp. Max.	260°C
MSL	1

[Click To Quote](#)

Example Part Number: V3000TL-18-A-27-24M576

V3000TL	1	2	3	4
	Voltage	Stability	Temp. Range	Frequency
	33= 3.3 V	A= ±50	16= -10 to 60°C	Frequency in MHz
	25= 2.5V	B= ±25	27= -20 to 70°C	i.e. 24M576
		C= ±20	48= -40 to 85°C	use M for decimal point