


TT-VT1900M1 Crystal Oscillator




FEATURES:
Clipped Sine
Ceramic Package

Low Current Draw
11.4 x 9.6 x 1.85 mm

Parameter	Unit	Min.	Max.
Frequency Range	MHz	9.6	40
Frequency Tolerance at 25°C	ppm	-	±0.5
Frequency Stability			
Vs. Supply Voltage (±5%) change	ppm	-	±0.3
Vs. Load (±10%) change	ppm	-	±0.3
Vs. Aging	ppm	-	±1.0
Current Consumption	mA	-	3.5
Storage Temperature Range	°C	-55	+125
Voltage		3.3, 5.0 ±5%	
Output Waveform		Clipped Sine	
Output Level	Vp-p	0.8	-
Load		10KOhms/10pF	
Control Voltage Range (VCTCXO)	V	0.5	2.5
Frequency Deviation (VCTCXO)	ppm	±5	±15
VC Input Impedance (VCTCXO)	KOhms	500	-
Frequency Adjustment (Trimmer)	ppm	±3.0	-

Frequency Stability vs. Temperature Range

Temperature	Stability (ppm)
-10 to 60°C	±1.0, ±2.5
-20 to 70°C	±1.0, ±2.5
-40 to 85°C	±2.5

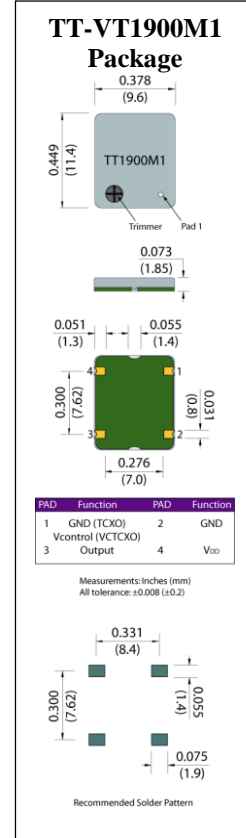

Environmental

Terminal Material	W
Terminal Plating	Ni-Au
REACH Compliant	Yes
RoHS Compliant	Yes
RoHS Exemptions	No
Re-flow Temp. Max.	260°C
MSL	1

[Click To Quote](#)

Example Part Number: VT1900M1-A-18-A-27-24M576

VT1900M1	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
		1		2		3		4		5
		Stability		Voltage		Pull Range		Temp. Range		Frequency
		A = ±2.5		50= 5.0 V		A = ±15		16= -10 to 60°C		Frequency in MHz
		B = ±1.0		33= 3.3V		B = ±10		27= -20 to 70°C		i.e. 24M576
						C = ±8		48= -40 to 85°C		use M for decimal
						D = ±5				point
						T = TCXO				